Code No. LIT-1900916
Issued February 27, 2015

P2000 Security Management System DVR/VMS Integration

Description

Johnson Controls provides integration options for the P2000 Security Management System and approved Digital Video Recorders (DVRs) and Video Management Systems (VMSs).

Using advanced video compression technologies, users can record and store superior quality digital images in a fraction of the space traditionally required by analog systems.

The integrated P2000 and DVR/VMS user interface incorporates many standard features of the P2000 video integration subsystem, and also allows authorized P2000 users to manage the recording and pan, tilt, and zoom (PTZ) functions of many cameras from a single P2000 workstation.

Depending on the DVR/VMS equipment used, the integration enables an authorized P2000 user to search, retrieve, and download archived audio/video (AV) recordings from any transaction or surveillance camera, from any place, at any time.

Additionally, P2000 events and triggers can be tied to live or recorded audio-visual streams.

The DVR system communicates with the P2000 server by using a TCP/IP connection. The communication is provided by the P2000 CCTV Server, a software component installed automatically with the DVR/VMS option.

Features and Benefits

- **User-friendly standard Microsoft® Windows® interface** – enables you to directly access DVR/VMS controls through an intuitive map screen; clicking an icon on the map screen allows you to select DVR/VMS control options
- **Live and recorded audio/video** – is available for viewing from the P2000 alarm monitor, real-time map, or real-time list
- **Control of DVR/VMS recording functions** – is available from a P2000 workstation interface
- **Option to record predefined P2000 events and alarms with higher video quality** – helps investigate incidents and saves storage space by using lower resolution for the remaining recording times
- **Selection, retrieval, and download of still pictures or video clips to your local computer** – is easy after specifying the starting time, date, and duration from a specific camera
- **On-demand recording** – can be set up by configuring the P2000 system to record specific predefined events
- **Flexible query options** – let you recall video images by using a variety of query options: time and date, alarm events, camera ID, and DVR/VMS ID
- **Control of PTZ functions** – is available from the P2000 interface
- **Scalability of the DVR/VMS integration with the P2000 system** – lets you expand to multiple sites using an unlimited number of cameras to accommodate the expanding digital network needs of your organization
- **Viewing panel** – allows for live-monitoring and switching of cameras and monitors within the P2000 application, provided the third-party DVR/VMS vendor supports spot monitor functionality
- **Extensive alarm options available through integration with P2000** – include features such as Escalation, Acknowledgement/ Response Required before Completion, Associated AV Channel, and Associated Real Time Map

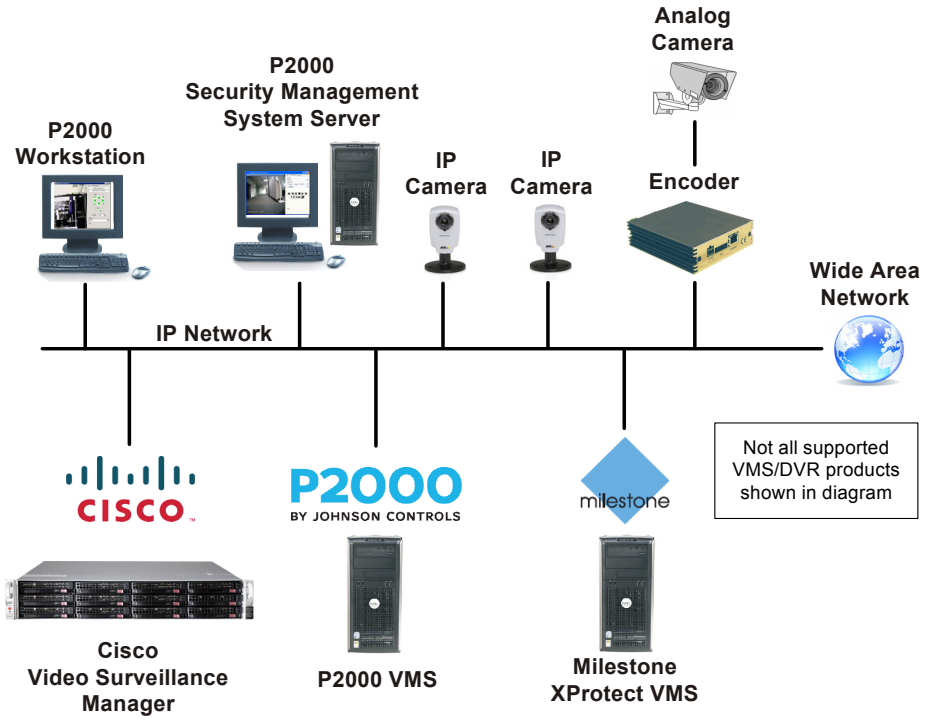

Example of P2000 Integration with Multiple DVR/VMS Products

Note: When using multiple DVR/VMS integrations, refer to the *P2000 DVR Integration Manual (Part No. 24-10786-52)* for compatibility.

The performance specifications are nominal and conform to acceptable industry standards. For applications at conditions beyond these specifications, consult the local Johnson Controls office. Johnson Controls, Inc. shall not be liable for damages resulting from misapplication or misuse of its products. © 2015 Johnson Controls, Inc.

P2000 Security Management System DVR/VMS Integration (Continued)

Supported Protocols

The DVR/VMS integration with P2000 Versions 3.13 and higher supports the following protocols, original equipment manufacturer (OEM) software versions, and software development kits (SDKs):

Supported Protocols

Vendor/Protocol[1]	OEM Software Version	SDK Version	Notes
Johnson Controls® Digital Vision Network (DVN) 5000	2.7 2.9 2.10	2.7 2.9 2.10	The AV Player's live video monitoring may not be available on computers using a Windows Server® operating system.
Johnson Controls P2000 Video Management System (VMS)	6.13	6.13	N/A
Aimetis Symphony®	6.12 6.13	6.13	The Aimetis Symphony client cannot be installed on the same system as the P2000 server or workstation.
Avigilon® Control Center Standard and Enterprise Editions	5.0	5.0	N/A
Bosch® Video Management System (VMS)	4.5.5	Cameo 4.5.5	The AV Player's live and recorded video is not available on computers using a Windows Server operating system.
Cisco® Video Surveillance Manager	7.5.0	7.5.0	Supported server operating system: Windows Server 2008 R2 (64 bit). Windows Server 2012 is not supported. Supported workstation operating system: Windows® 7 (64 bit).
Genetec® Omnicast®	4.8	4.8	N/A
Honeywell® Rapid Eye®	7.0 Build 81	2.0.2.0	N/A
Milestone XProtect™ Corporate	5.0 or earlier	MIP 3.0a	N/A
Milestone XProtect Enterprise	8.0c	MIP 3.0a	N/A
Milestone XProtect Professional	8.0b	MIP 3.0a	N/A
Milestone XProtect Express	1.0b	MIP 3.0a	N/A
Nice™ Pro/Alto/Vsat	N/A	10.5 SP1 10.7	The Nice 10.5 protocol with SP1 is not supported on Windows 7.
On-Net Surveillance Systems (OnSSI®) Ocularis® CS	3.6	3.6	Supported server operating system: Windows Server 2008 R2 (64-bit). Windows Server 2012 is not supported. Supported workstation operating system: Windows 7 (32-bit). Enable **Message Queuing** before installing OnSSI codecs.
Panasonic® WJ-ND400	1.01 1.31	1.0011.0	Requires hardware Version 1.0.[2]
Panasonic WJ-ND300	4.30	1.0011.0	Requires hardware Version 1.0.[2]
Pelco® X-Portal™ DX8100	02.0.00.2717	3.3.0.18[3]	Pelco X-Portal DX8100 protocol is supported only on Windows XP®.
Pelco X-Portal Endura®	02.04.00.9584	3.3.0.18[3]	N/A
Pelco Endura	02.04.00.9584	2.2[3]	The Pelco Endura protocol is not supported on 64-bit operating systems.
Verint® Nextiva™	6.0.4706.0	6.3	The Nextiva protocol is not supported on Windows 7 or Windows Server 2012.

1. P2000 contains software produced and copyrighted by the following third-party manufacturers: Cisco, Genetec, Milestone, Nice, OnSSI, Panasonic, Pelco, and Verint.
2. Refer to the *P2000 DVR/VMS Integration Manual (Part No. 24-10786-52)* for information regarding Windows Server 2012.
3. For information on cameras supported by Pelco SDKs, refer to: http://pdn.pelco.com/content/integrating-pelco-products

Note: AV players cannot be used in virtual machines. Refer to the *P2000 DVR Integration Manual (Part No. 24-10786-52)* for additional limitations.

The performance specifications are nominal and conform to acceptable industry standards. For applications at conditions beyond these specifications, consult the local Johnson Controls office. Johnson Controls, Inc. shall not be liable for damages resulting from misapplication or misuse of its products. © 2015 Johnson Controls, Inc.

P2000 Security Management System DVR/VMS Integration (Continued)

For information on the features supported for each protocol and version, see the following tables. In these tables, a check mark indicates that the feature is supported.

P2000 Events AV Action

P2000 Events AV Action[1]	Protocol																		
	Johnson Controls DVN 5000	Johnson Controls P2000 VMS	Aimetis Symphony	Avigilon Control Center	Bosch VMS	Cisco Video Surveillance Manager	Genetec Omnicast	Honeywell Rapid Eye	Milestone Corporate	Milestone Enterprise	Milestone Professional	Milestone Express	Nice (all versions)	OnSSI Ocularis CS	Panasonic	Pelco X-Portal DX8100	Pelco X-Portal Endura	Pelco Endura	Verint Nextiva
Camera Preset	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Camera Send Alarm[2]	✓						✓[3]								✓				✓
Camera Send Alarm Associated Input	✓						✓[3]								✓				✓
Camera Send Alarm Associated Terminal	✓						✓[3]								✓				✓
Camera Start Recording	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓				✓
Camera Start Recording Associated Input	✓	✓	✓	✓		✓	✓		✓	✓	✓	✓	✓	✓	✓				✓
Camera Start Recording Associated Terminal	✓	✓	✓	✓		✓	✓		✓	✓	✓	✓	✓	✓	✓				✓
Camera Stop Recording	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓				✓
Camera Stop Recording Associated Input	✓	✓	✓	✓		✓	✓		✓	✓	✓	✓	✓	✓	✓				✓
Camera Stop Recording Associated Terminal	✓	✓	✓	✓		✓	✓		✓	✓	✓	✓	✓	✓	✓				✓
Launch AV Player	✓[3]	✓[4]	✓[4]	✓[4]	✓	✓[4]	✓	✓[4]	✓[4]	✓[4]	✓[4]	✓[4]	✓	✓[4]	✓[3]	✓[3]	✓[3]	✓[4]	✓
Monitor Camera					✓		✓		✓	✓	✓		✓				✓	✓	

1. Refer to the *P2000 Software User Manual (Part No. 24-10786-176)* for a description of the event action types.
2. For Milestone Enterprise, Professional, and Express versions, the event must be defined under Global Events on the Milestone VMS, and the name of the event must match the name of the camera.
3. Refer to the *P2000 DVR/VMS Integration Manual (Part No. 24-10786-52) Chapter 4: Protocol Integration* for additional notes.
4. Integration with this protocol uses a proprietary viewer application instead of the AV Player. Refer to the *P2000 DVR/VMS Integration Manual (Part No. 24-10786-52) Chapter 4: Protocol Integration* for details.

AV Alarm Subscription

AV Alarms	Protocol																		
	Johnson Controls DVN 5000	Johnson Controls P2000 VMS	Aimetis Symphony	Avigilon Control Center	Bosch VMS	Cisco Video Surveillance Manager	Genetec Omnicast	Honeywell Rapid Eye	Milestone Corporate	Milestone Enterprise	Milestone Professional	Milestone Express	Nice (all versions)	OnSSI Ocularis CS	Panasonic	Pelco X-Portal DX8100	Pelco X-Portal Endura	Pelco Endura	Verint Nextiva
Motion alarm	✓	✓	✓	✓[1]	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Behavior alarm	✓						✓	✓					✓						
Dry contact alarm	✓						✓			✓	✓	✓			✓	✓			
DVR system alarms	✓			✓			✓	✓	✓	✓	✓	✓		✓					
Video loss alarm	✓	✓	✓	✓[1]		✓	✓	✓	✓	✓	✓	✓	✓		✓	✓			✓

1. Requires a rule to be defined in the Avigilon system. Supported in integration with Avigilon Enterprise Edition only (cannot be used in Avigilon Standard Edition).

The performance specifications are nominal and conform to acceptable industry standards. For applications at conditions beyond these specifications, consult the local Johnson Controls office. Johnson Controls, Inc. shall not be liable for damages resulting from misapplication or misuse of its products. © 2015 Johnson Controls, Inc.

P2000 Security Management System DVR/VMS Integration (Continued)

AV Player Action

Action	Protocol																		
	Johnson Controls DVN 5000	Johnson Controls P2000 VMS	Aimetis Symphony	Avigilon Control Center	Bosch VMS	Cisco Video Surveillance Manager[1]	Genetec Omnicast	Honeywell Rapid Eye[1]	Milestone Corporate[1]	Milestone Enterprise[1]	Milestone Professional[1]	Milestone Express[1]	Nice (all versions)	OnSSI Ocularis CS[1]	Panasonic	Pelco X-Portal DX8100	Pelco X-Portal Endura	Pelco Endura	Verint Nextiva
Call up live video	✓	✓	✓	✓[2]	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Retrieval of video	✓	✓	✓	✓[2]		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PTZ control	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Capture video	✓			✓		✓			✓	✓	✓	✓		✓				✓	
Capture image	✓	✓	✓	✓		✓	✓		✓	✓	✓	✓	✓	✓	✓			✓	

1. Integration with this protocol uses the DVR's viewer application instead of the AV Player. Refer to the *P2000 DVR/VMS Integration Manual (Part No. 24-10786-52) Chapter 4: Protocol Integration* for details.
2. Video only (no audio).

Hardware Requirements

To operate the DVR/VMS option in P2000, both the P2000 server and P2000 workstation require video cards compliant with Microsoft® DirectX® 9.0. If a graphic card is not compliant with DirectX 9.0, the CCTV Service and AV Player do not function properly.

The Panasonic DVR requires the workstation video card to be set to 32 bits per pixel.

The Pelco Endura protocol requires an NVIDIA video card.

Consult with the DVR/VMS vendor for detailed hardware requirements.

Ordering Information

Part Number[1]	Description
P2K-DV-PVMS313	P2000 VMS Integration
P2K-DV-AMTS313	Aimetis Integration (1 connection)
P2K-DV-AVGN313	Avigilon Integration (1 connection)
P2K-DV-BVMS313	Bosch VMS Integration (1 connection)
P2K-DV-CISCO313	Cisco Video Security Manager Integration (1 connection)
P2K-DV-GNTEC313	Genetec Integration (1 connection)
P2K-DV-MILE313	Milestone Integration (1 connection)
P2K-DV-NXTVA313	Verint Nextiva Integration (1 connection)
P2K-DV-NICE313	Nice Integration (1 connection)
P2K-DV-ONSSI313	OnSSI Integration (1 connection)
P2K-DV-XPRT313	Pelco Integration (1 connection)
P2K-DV-PAN313	Panasonic Integration (1 connection)
P2K-DV-RPEYE313	Honeywell Rapid Eye Integration (1 connection)

1. Integration with DVN 5000 protocol does not require a part number.

Related Documentation

Document Title	Document Number
P2000 DVR/VMS Integration Manual	*Part No. 24-10786-52*
P2000 Software Installation Manual	*Part No. 24-10786-141*
P2000 Software User Manual	*Part No. 24-10786-176*
DVN 5000 Rackmount Series Installation Guide	*Part No. 24-10129-4*
DVN 5000 Series RAID Management Guide	*Part No. 24-10177-3*
DVN 5000 Series Software Installation and Configuration Manual	*Part No. 24-10248-5*
DVN 5000 Series Software User Manual	*Part No. 24-10248-13*
VisionPocket and SiteManager Software User Manual	*Part No. 24-10248-56*
DVN 5000 and DVN 3000 Series Software Development Kit (SDK) Reference Manual	*Part No. 24-10352-18*
DVN 5000 Series Quick Startup Guide	*Part No. 24-10520-14*
DVN 5000 Series Storage, Shipping, and Environmental Guidelines	*Part No. 24-10520-22*
DVN 5000 Safety Information	*Part No. 24-10598-8*
DVN 5000 and DVN 100-NET Series Software Release Notes	*Part No. 24-10318-37*
DVN 5000 Rackmount Series System Drive Replacement Instructions	*Part No. 24-10129-101*
DVN 5000 Rackmount Series Product Bulletin	*LIT-12011200*

The performance specifications are nominal and conform to acceptable industry standards. For applications at conditions beyond these specifications, consult the local Johnson Controls office. Johnson Controls, Inc. shall not be liable for damages resulting from misapplication or misuse of its products. © 2015 Johnson Controls, Inc. **www.johnsoncontrols.com**